



CITY OF HARARE

TOWN CLERK'S DEPARTMENT
SUPPLY CHAIN MANAGEMENT SECTION
NO 2 CONVENTY ROAD, HARARE
TELEPHONE: 752356/7/8/0 749897

When replying please quote Ref NO: FUEL AND LUBRICANTS

011 FEBRUARY 2021

NOTICE TO ALL SUPPLIERS

Would you please quote for the supply and delivery of the fuel and lubricants listed below: -

Item No	Description	Unit Of Measurement	Quantity
1	Diesel	litre	300 000
2	Petrol	litre	150 000
3	Delvac oil (attached spec)	drum	5

(a) **Attachments**

- (i) Documentary proof of registration with the Procurement Regulatory Authority of Zimbabwe (PRAZ) **on the relevant category a must.**
- (ii) VAT Certificate
- (iii) TAX Clearance
- (iv) Registered with ZERA a **must**
- (iv) City of Harare business licence or of any local authority where the company operates from.

-

(b) **Instructions**

- (i) Quotations in sealed envelopes quoting the reference number and the category must be deposited into the quotation box located in the reception area at City of Harare, Central Stores at No 2 Coventry Road, Workington, Harare **before 10:00hours on 12 February 2021.**
- (ii) The price must be quoted in **ZWL\$ only.**

Ms R Biza
Principal Buyer

Mobil Delvac Synthetic ATF


Allison TES 295 Approved Synthetic Automatic Transmission Fluid

Mobil Delvac Synthetic ATF is a synthetic fluid designed to meet the demanding requirements of modern heavy duty automatic transmissions. The optimized synthetic base oil mixture, which contains proprietary component SuperSyn, enables excellent performance even in some of the most severe operating conditions. It offers outstanding gear changing and power transfer performance. Its unique formulation has been validated by Allison to satisfy all the test requirements that are part of the rigorous TES 295 specification.

Compared to conventional ATF fluids, the high viscosity index and stability of Mobil Delvac Synthetic ATF protects against thermal breakdown at high operating temperatures, while still providing outstanding performance at below zero temperatures.

Mobil Delvac Synthetic ATF is recommended for use in modern high performance trucks, buses, utility vehicles, haulers, vans and other equipment requiring an Allison TES 295 approved lubricant. Mobil Delvac Synthetic ATF advanced technology has demonstrated extended drain, long-term friction retention, and low-temperature capability. Further, it improves overall transmission durability and cleanliness.

Finally, when seeking a fluid for your Allison transmission that is TES 295 approved, look and/or ask for one of two things: the Allison TES 295 approval number (Mobil Delvac Synthetic ATF's approval number is AN-051005), and/or the Allison Approved logo.

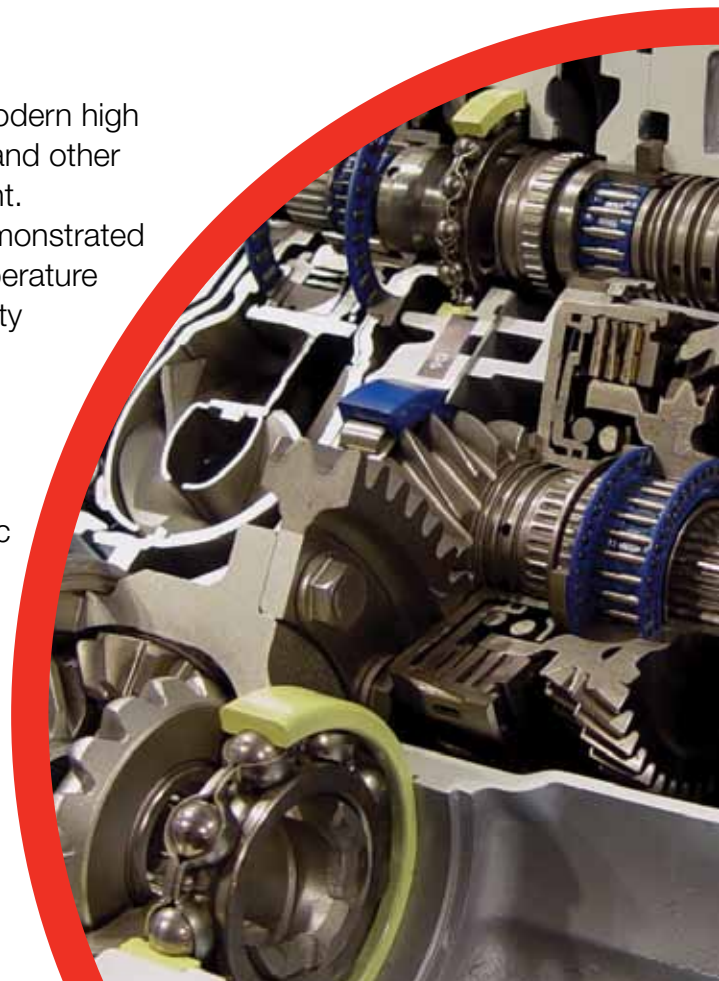


Typical Properties	Mobil Delvac Synthetic ATF
Viscosity, ASTM D 445 – cSt @ 40° C – cSt @ 100° C	39 7.3
Brookfield Viscosity, ASTM D 5293 – cP @ -40° C	8,400
Viscosity Index, ASTM D 2270	168
Pour Point, °C, ASTM D 97	-54
Flash Point, °C, ASTM D 92	235
Density @15° C kg/l, ASTM D 4052	0.85
Colour	Red



Engineered from an advanced, proprietary additive system, and an optimized, fully synthetic base oil mix containing SuperSyn (which is used in our Mobil 1 formulations), Mobil Delvac Synthetic ATF tackles some of the most extreme conditions to extend drain intervals compared to modern ATFs meeting Allison's mineral oil level specification TES 389.

Mobil Delvac Synthetic ATF for Extended Drains in Allison 3000 & 4000 Series Transmissions with High-Capacity Filters

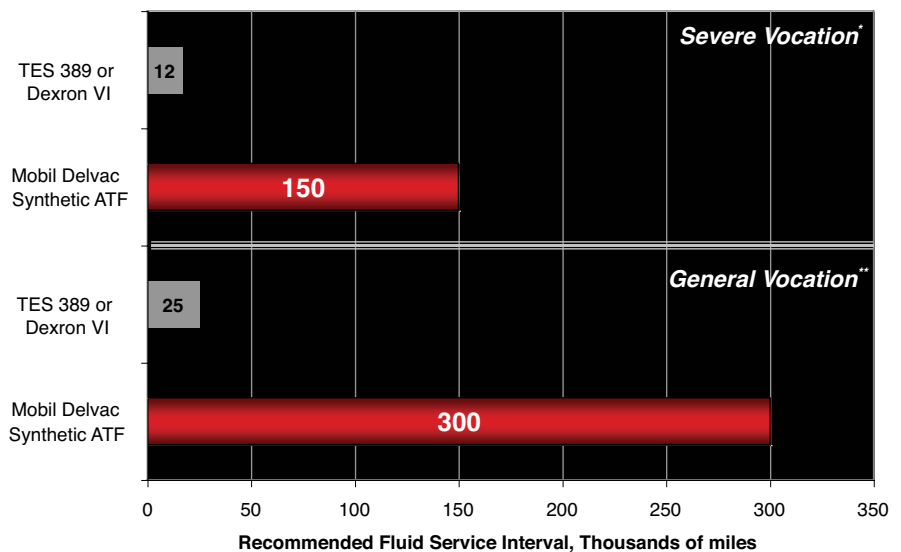

*General Vocation: all vocations not classified as severe and intercity coach with duty cycle of less than or equal to one stop per mile.
**Severe Vocation: all retarders, on/off highway, refuse, transit, and intercity coach with duty cycle greater than one stop per mile.
Testing source – ExxonMobil Research & Engineering

www.mobildelvac.com

©2011 Exxon Mobil Corporation

The Mobil Delvac and ExxonMobil logotypes are registered trademarks of Exxon Mobil Corporation or one of its subsidiaries.

ALLISON TRANSMISSION AND THE TES 295 APPROVED LOGO ARE TRADEMARKS OF ALLISON TRANSMISSION, INC., USED UNDER LICENSE TO ExxonMobil.

ExxonMobil Lubricants & Specialties
Division of ExxonMobil Petroleum & Chemical

Hermeslaan 2
1831 Machelen
Belgium

Corporate Separateness Notice

Nothing in this material is intended to override the corporate separateness of local entities. Working relationships discussed in this material do not necessarily represent a reporting connection, but may reflect a functional guidance, stewardship or service relationship. Where shareholder consideration of a local entity matter is contemplated by this material, responsibility for action and legal compliance remains with the local entity. The terms corporation, company, affiliate, ExxonMobil, Exxon, Mobil, our, we and its, as used in this material, may refer to Exxon Mobil Corporation, to one of its divisions or to the companies affiliated with Exxon Mobil Corporation, or to any one or more of the foregoing. The shorter terms are used merely for convenience and simplicity.